


# MCH 18/ET TROPICAL PLUS ERGO FRAME

## TROPICAL PLUS PUMPING UNIT



## FILTRATION: HYPERFILTER ACTIVE CARBON AND MOLECULAR SIEVE

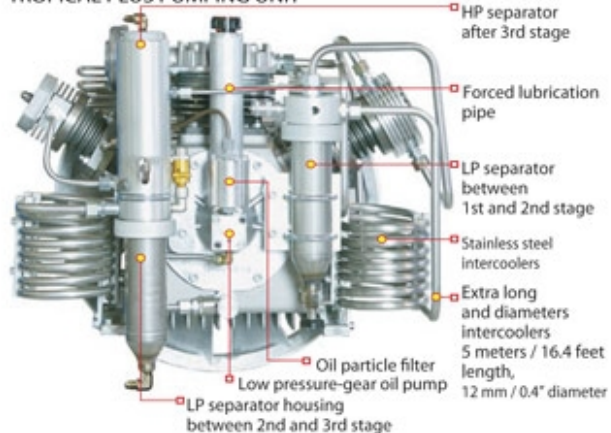

► Breathing air: DIN 3188 EN 12021 CGA E

## FEATURES

DRIVEN BY	CHARGING RATE			STAGES AND CYLINDERS	FILLING TIME CYLINDER 15 L 0-200 Bar	WORKING PRESSURE	DIMENSIONS	DRY WEIGHT	POWER	NOISE
	L/min	m <sup>3</sup> /h	CFM							
Three-phase Electric motor	300	18	10.5	3	7 min	225 Bar - 3200 Psi 300 Bar - 4300 Psi	Height 69 cm Width 58 cm Length 97 cm	130 Kg	5.5 Kw (230/400V-50/60 Hz) 6.6 Kw (440/480V-60Hz)	82,3 dB <small>ISO 3746</small>

MCH 18 ET Cod.

230 v - 50 Hz : SC100110/TP  
 230 v - 60 Hz : SC100111/TP  
 400 v - 50 Hz : SC100112/TP  
 440 v - 50 Hz : SC100113/TP



Fitted with Hyperfilter

Full control panel