



# MCH 8, 11, 13, 16/ET MINITECH FRAME

PUMPING UNIT

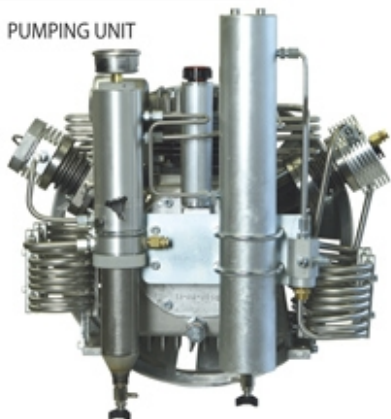

FILTRATION:  
1 MAXIFILTE<sup>®</sup> REACTIVE CARBON AND MOLECULAR SIEVE

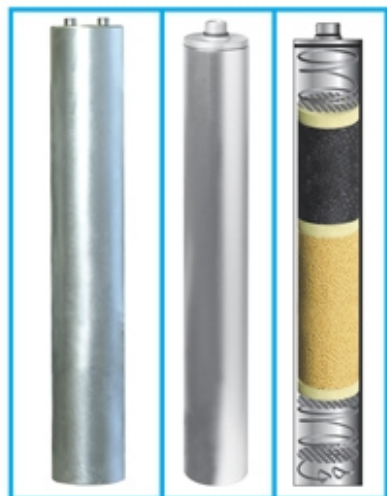

► Breathing air: DIN 3188 EN 12021 CGA E

## FEATURES

DRIVEN BY	CHARGING RATE			STAGES AND CYLINDERS	FILLING TIME CYLINDER 15 L 0-200 Bar	WORKING PRESSURE	DIMENSIONS	DRY WEIGHT	POWER	NOISE
	L/min	m <sup>3</sup> /h	CFM							
Three-phase electric motor	MCH 13 215	MCH 13 13	MCH 13 7,5	3	MCH 13 9 min	225 Bar - 3200 Psi 300 Bar - 4300 Psi	Height 68 cm Width 54 cm Length 93 cm	MCH 13 125 Kg	MCH 13 4 Kw (230/400 V - 50/60 Hz) 4,8 Kw (440/480 V - 60 Hz)	MCH 13/16 82,3 dB ISO 3746
	MCH 16 265	MCH 16 16	MCH 16 9		MCH 16 8 min					
Single-phase electric motor	MCH 8 135	MCH 8 8	MCH 8 5		MCH 8 15 min			MCH 8 125 Kg	MCH 8 6,6 Kw (440/480 V - 60 Hz)	MCH 8/11 79 dB ISO 3746
	MCH 11 195	MCH 11 11	MCH 11 7		MCH 11 11 min					

**MCH 13/ ET Cod.**  
 230 v - 50 Hz : SC000214/MT  
 230 v - 60 Hz : SC000172/MT  
 400 v - 50 Hz : SC000170/MT  
 440 v - 60 Hz : SC000174/MT

**MCH 16/ ET Cod.**  
 230 v - 50 Hz : SC000231/MT  
 230 v - 60 Hz : SC000232/MT  
 400 v - 50 Hz : SC000230/MT  
 400 v - 60 Hz : SC000245/MT

**MCH 8/ EM Cod.**  
 230 v - 50 Hz : SC000165/MT  
 230 v - 60 Hz : SC000166/MT

**MCH 11/ EM Cod.**  
 230 v - 50 Hz : SC000185/MT  
 230 v - 60 Hz : SC000186/MT

### OPEN HANDLES FOR EASY MOVING



- ▶ Complete automatic switchboard: start/stop, auto drain with timer and auto/stop



### OPTIONAL ACCESSORIES