

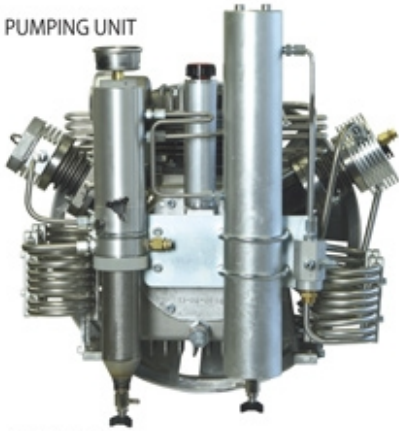


MCH 13-16/SH MINI TECH FRAME

PUMPING UNIT

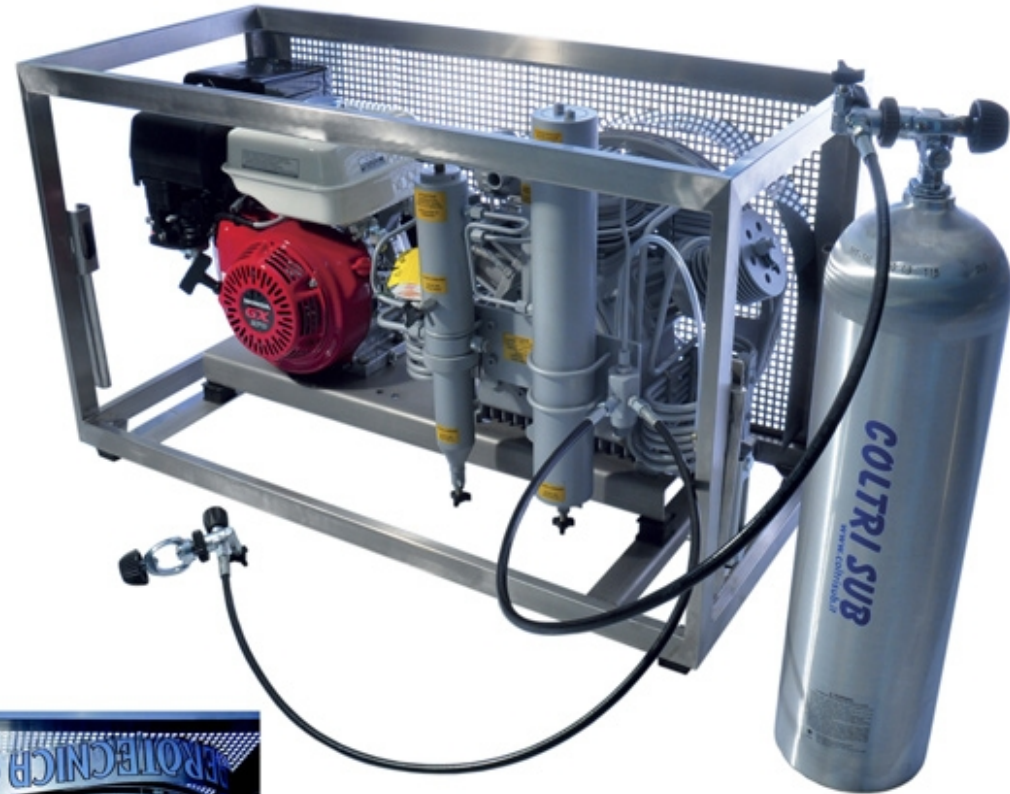

FILTRATION:
1 MAXI FILTER ACTIVE CARBON AND MOLECULAR SIEVE

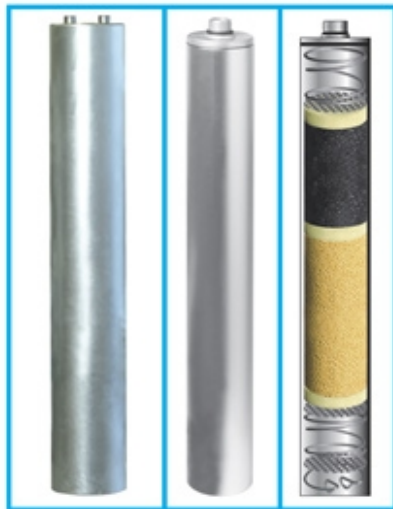

► Breathing air: DIN 3188 EN 12021 CGA E


FEATURES

DRIVEN BY	CHARGING RATE			STAGES AND CYLINDERS	FILLING TIME CYLINDER 15 L 0-200 Bar	WORKING PRESSURE	DIMENSIONS	DRY WEIGHT	SAFETY VALVE	POWER	NOISE
	L/min	m ³ /h	CFM								
Honda petrol engine	MCH 13 215	MCH 13 13	MCH 13 7,5	3	MCH 13 9 min	225 Bar - 3200 Psi 330 Bar - 4700 Psi	height 61 cm width 112 cm depth 53 cm	130 Kg	2 interstage 1 last stage	6,6 Kw	95,6 dB <small>ISO 1746</small>
	MCH 16 265	MCH 16 16	MCH 16 9		MCH 16 8 min						

MCH 13/SH Cod.
Honda GX 270 : SC000180/MT
MCH 16/SH Cod.
Honda GX 270 : SC000240/MT

OPTIONAL ACCESSORIES

- ▶ Electric start
- ▶ 300 Bar version
- ▶ Autostop

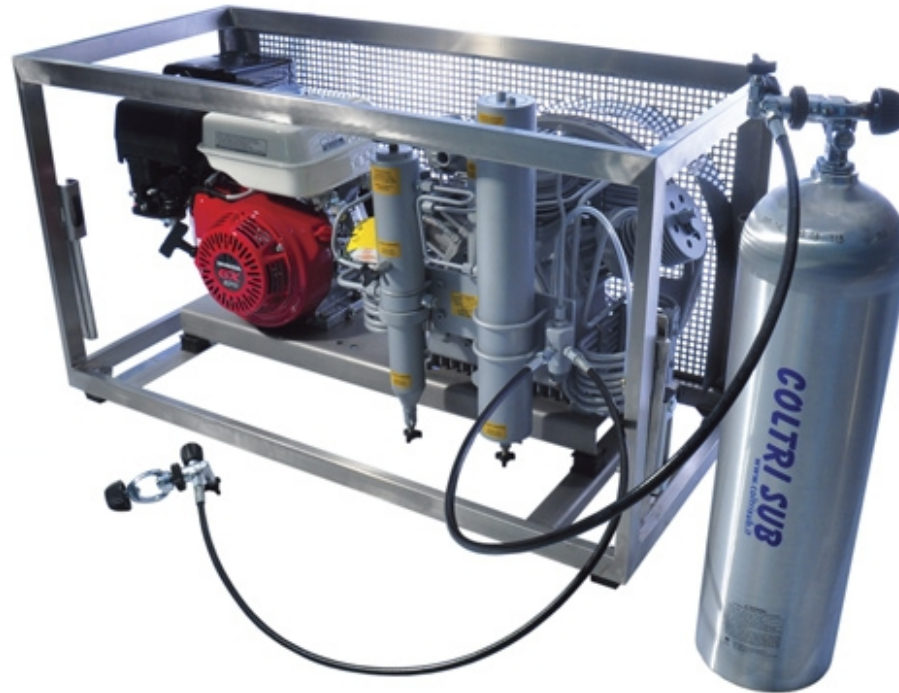

OPEN HANDLES FOR EASY MOVING



POWERED BY **HONDA**